





METRIC PRECISION SHOULDER SCREW SOCKET HEAD

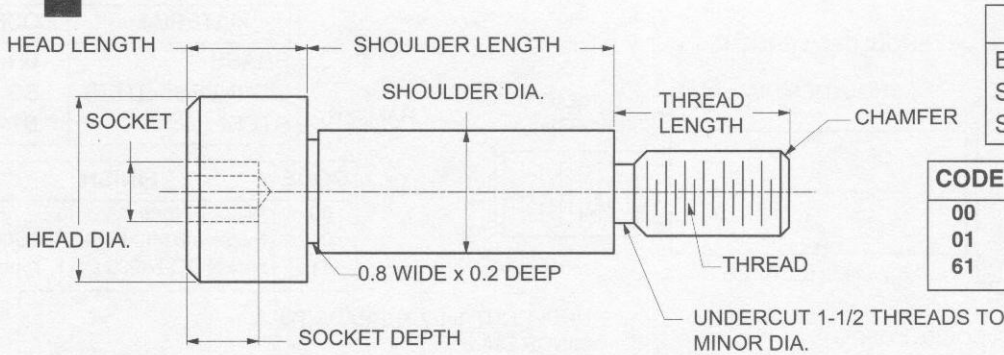

MATERIAL	CODE
BRASS	BR
STAINLESS STEEL	SS
STEEL	ST

CODE	FINISH
00	Plain — None
01	Passivate MIL-F-14072-E300
61	Nickel QQ-N-290 CL 1, Type VI KC



BASIC PART NUMBER	THREAD	HEAD DIAMETER ±0.1	SHOULDER DIAMETER +0.000 -0.026	HEAD LENGTH ±0.25	SHOULDER LENGTH +0.053 -0.000	THREAD LENGTH ±0.13	SOCKET +0.05 -0.00	SOCKET DEPTH (MIN.)
5370	M3X0.5	6	3.16	3.18	3.18	4	2	1.6
5371	M3X0.5	6	3.16	3.18	4.76	4	2	1.6
5372	M3X0.5	6	3.16	3.18	6.35	4	2	1.6
5373	M3X0.5	6	3.16	3.18	7.94	4	2	1.6
5374	M3X0.5	6	3.16	3.18	9.52	4	2	1.6
5375	M3X0.5	6	3.16	3.18	11.11	4	2	1.6
5376	M3X0.5	6	3.16	3.18	12.70	4	2	1.6
5377	M3.5X0.6	7	3.96	3.18	3.18	4.75	2.5	2
5378	M3.5X0.6	7	3.96	3.18	4.76	4.75	2.5	2
5379	M3.5X0.6	7	3.96	3.18	6.35	4.75	2.5	2
5380	M3.5X0.6	7	3.96	3.18	7.94	4.75	2.5	2
5381	M3.5X0.6	7	3.96	3.18	9.52	4.75	2.5	2
5382	M3.5X0.6	7	3.96	3.18	11.11	4.75	2.5	2
5383	M3.5X0.6	7	3.96	3.18	12.70	4.75	2.5	2
5384	M3.5X0.6	7	3.96	3.18	14.29	4.75	2.5	2
5385	M3.5X0.6	7	3.96	3.18	15.87	4.75	2.5	2
5386	M3.5X0.6	7	3.96	3.18	17.46	4.75	2.5	2
5387	M3.5X0.6	7	3.96	3.18	19.05	4.75	2.5	2
5388	M4X0.7	8	4.75	3.96	3.18	4.75	2.5	2
5389	M4X0.7	8	4.75	3.96	4.76	4.75	2.5	2
5390	M4X0.7	8	4.75	3.96	6.35	4.75	2.5	2
5391	M4X0.7	8	4.75	3.96	7.94	4.75	2.5	2
5392	M4X0.7	8	4.75	3.96	9.52	4.75	2.5	2
5393	M4X0.7	8	4.75	3.96	11.11	4.75	2.5	2
5394	M4X0.7	8	4.75	3.96	12.70	4.75	2.5	2
5395	M4X0.7	8	4.75	3.96	14.29	4.75	2.5	2
5396	M4X0.7	8	4.75	3.96	15.87	4.75	2.5	2
5397	M4X0.7	8	4.75	3.96	17.46	4.75	2.5	2
5398	M4X0.7	8	4.75	3.96	19.05	4.75	2.5	2
5399	M4X0.7	8	4.75	3.96	22.22	4.75	2.5	2
5400	M4X0.7	8	4.75	3.96	25.40	4.75	2.5	2



D20